


Features


- Type P-CS in size (17.6H x 31.1W x 14.2D mm) and weight (approx. 10.5g)
- Low torque and sensitive switch
- Ratings: 5A, 125VAC / 3A, 250VAC

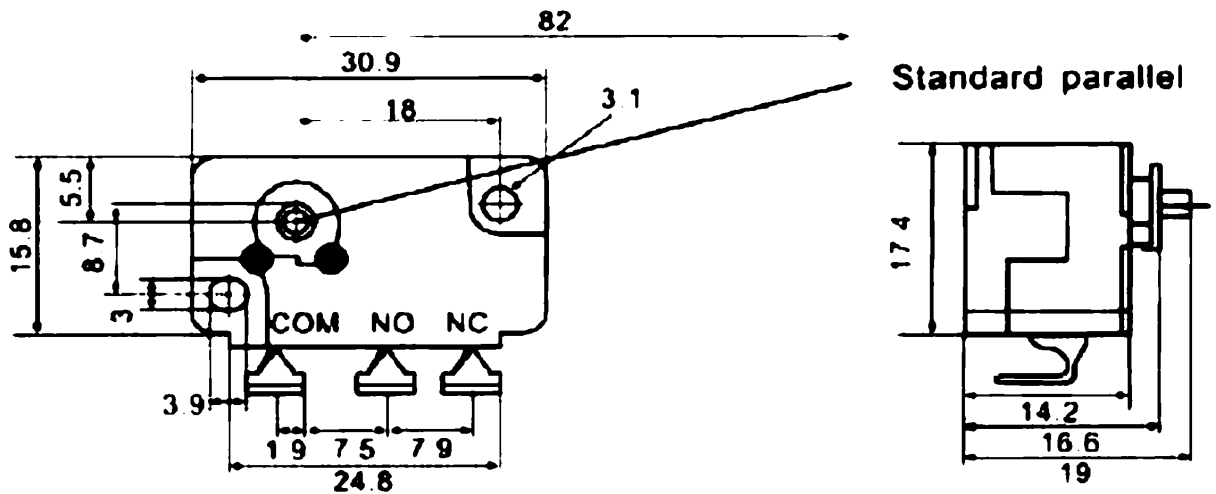

Specifications

Item	Standard
Operating speed	1' ~360' / secretary
Operating frequency	240 operations / min
Contact resistance	15m Ω max. (initial)
Insulation resistance	100M Ω min. (at DC 500V)
Dielectric strength	
Between contacts	AC600V RMS; 50/60Hz for 1 minute.
Between terminals and ground	AC1,500V RMS; 50/60Hz for 1 minute.
Vibration	10~55Hz; 1.5mm double amplitude.
Ambient temperature	-25° C ~ 80° C
Mechanically	1,000,000 operations / min
Electrically	100,000 operations / min (at rated load)

Active direction

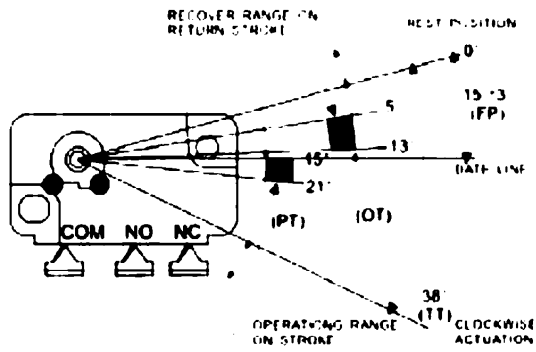

Operating characteristics

Operating force (OF) max.	5.1g
Releasing force (RF) max.	0.6g
Pretravel (PT) max.	21°
Overttravel (OT) min.	17°
Movement differential (MD) min.	3°
Return travel (RT) min.	5°
Total travel (TT) min.	38°
Free position (FP)	15 ± 3