


SPECIFICATION FOR
Power NTC thermistors
NTC 5D-25

1. TYPE No: NTC2.5D-25

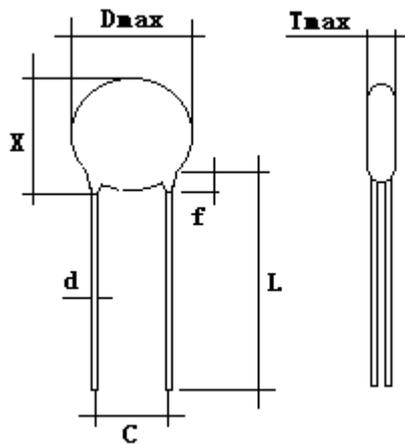

2. PHYSICAL DIMENSIONS:

规格	尺寸(mm)				
	Dmax	Lmax	C+/-1	Tmax	d+/-0.5
Φ 25	29	30	10	8	1.0

3. ENVELOPMENT AND LEAD WIRE:

Envelopment material: bakelite

lead wire: Sn-Cu lead

4. ELECTRICAL CHARACTERISTICS:

Resistance at 25°C (ohm): 5ohm

Max steady state current(A): 14A

Thermal dissipation constant: >30mw/°C

Thermal time constant: <130sec

Temperature range: -40~170°C

5. RELIABILITY TEST:

	Ltem	Specifications	Test condition
5.1	Solderability	More than 95% of termination Should be covered with new solder	Temperature: 235+/-2°C Solder:Sn:pb=60:40 Duration:2+/-2.5s
5.2	Resistance to soldering heat	No evidence of damage △ R/R≤+/-3% △ B/B≤+/-2%	Temperature: 235+/-2°C Solder:Sn:pb=60:40 Duration:5+/-0.5s
5.3	Terminal strength	No evidence of damage	Applied specified pull strength(5.0kg) for one minute
5.4	Vibration	△ R/R≤+/-3% △B/B≤+/-2%	X Y and Z direction 4h/direction Acceleration: 200m/s
5.5	Resistance value	Ω +/-20%	Test voltage:1.5VDC Temperature: 25+/-2°C
5.6	Insulation resistance	≥500M Ω	Test voltage: 500VDC
5.7	Dielectric withstanding voltage	No evidence of damage or flash over No discharge during test	Apply 700VAC voltage between termination for one second Current allowable value: 5mA
5.8	Temperature shock	No evidence of damage △ R/R≤+/-3% △B/B≤+/-2%	Temperature: -55 °C ∼ 170 °C 5 cycles 30min for each
5.9	Storage temperature	No evidence of damage Insulation resistance ≥ 100M Ω △ R/R≤+/-3% △B/B≤+/-2%	Subjected at the following temperature: 5. 180+/-2°C for 48hours 6. -62+/-2°C for 3hours
5.10	Withstanding current shock	No evidence of damage △ R/R≤+/-3% △B/B≤+/-2%	Temperature: 25+/-2°C Current: A

Note: B constant test:

Resistance value of NTC thermistors shall be tested after 24 hours at room temperature (25+/-1°C)