

MFT Type NTC Thermistor

1. Features

Coating: Epoxy resin

Compensation temperature for kinds of Transistor

Compensation temperature for a measuring instrument and all kinds circuit

2. Applications

All kinds of circuit

Office Equipment and industrial Equipment



3. Part NO

MFT
JOCOL series


 D
Disk

Resistance

Tolerance

| Symbol of Tolerance | F | G | H | J | K | M |
|---------------------|----|----|----|----|-----|-----|
| Tolerance | 1% | 2% | 3% | 5% | 10% | 20% |

4. Shape and Dimensions

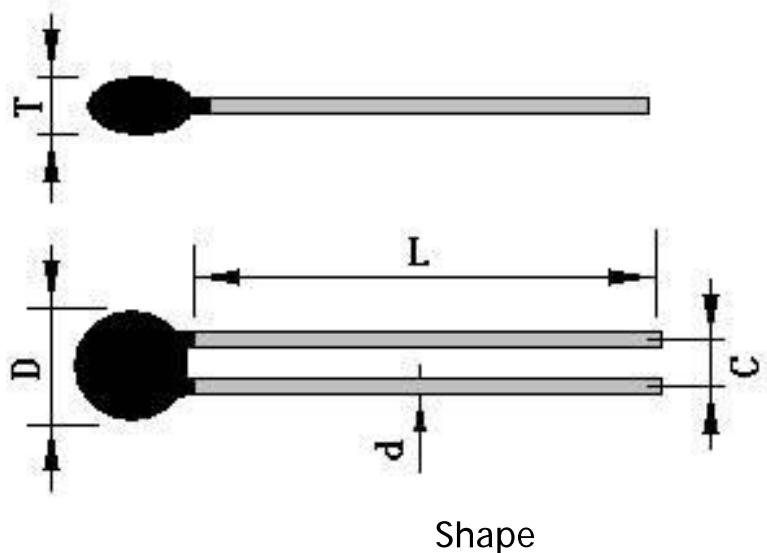

Dimensions : (mm)

| Disk | Dmax | Tmax | Lmin | C | d±0.05 |
|------|------|------|------|---------|--------|
| 05D | 6.0 | 4.5 | 25 | 2.5/5.0 | 0.45 |
| 03D | 3.5 | 3.0 | 25 | 2.5 | 0.45 |

5. Electrical characteristics

03D:

| Part NO | Resistance At 25°C (KΩ) | B _{25/50} value (K) | Thermal dissipation constant (mW/°C) | Thermal time constant (s) | Temperature Range (°C) |
|---------------|-------------------------|------------------------------|--------------------------------------|---------------------------|------------------------|
| MFT03D101-305 | 100 | 3050 | 2.5 | 16 | -55~125 |
| MFT03D502-327 | 5K | 3270 | | | |
| MFT03D103-338 | 10K | 3380 | | | |
| MFT03D502-347 | 5K | 3470 | | | |
| MFT03D103-347 | 10K | 3470 | | | |
| MFT03D202-392 | 2K | 3920 | | | |
| MFT03D502-395 | 5K | 3950 | | | |
| MFT03D503-395 | 50K | 3950 | | | |
| MFT03D473-395 | 47K | 3950 | | | |
| MFT03D104-410 | 100K | 4100 | | | |

05D:

| Part NO | Resistance At 25°C (KΩ) | B 25/50 value (K) | Thermal dissipation constant (mW/°C) | Thermal time constant (s) | Temperature Range (°C) |
|-----------|-------------------------|-------------------|--------------------------------------|---------------------------|------------------------|
| MFT05D100 | 10 | 2800 | | | |
| MFT05D200 | 20 | 2930 | | | |
| MFT05D470 | 47 | 3050 | | | |
| MFT05D500 | 50 | 3050 | | | |
| MFT05D101 | 100 | 3200 | | | |
| MFT05D151 | 150 | 3270 | | | |
| MFT05D201 | 200 | 3345 | | | |
| MFT05D301 | 300 | 3450 | | | |
| MFT05D471 | 470 | 3515 | | | |
| MFT05D501 | 500 | 3515 | | | |
| MFT05D102 | 1K | 3600 | | | |
| MFT05D222 | 2.2K | 3750 | | | |
| MFT05D332 | 3.3K | 3850 | 6 | 30 | -55~125 |
| MFT05D472 | 4.7K | 3950 | | | |
| MFT05D502 | 5 | 3950 | | | |
| MFT05D682 | 6.8 | 4050 | | | |
| MFT05D103 | 10K | 4050 | | | |
| MFT05D203 | 20K | 4100 | | | |
| MFT05D473 | 47K | 4300 | | | |
| MFT05D503 | 50K | 4300 | | | |
| MFT05D683 | 68K | 4300 | | | |
| MFT05D104 | 100K | 4450 | | | |
| MFT05D474 | 470K | 4700 | | | |
| MFT05D504 | 500K | 4700 | | | |
| MFT05D475 | 4.7M | 5300 | | | |